


Polyx™
Tri-Hex



Trademark and 2021 ©

Polyx™ Tri-Hex is designed to be modular in nature. The panels consists of three-dimensional triangular panels held together by connectors to create hexagonal units. Each of the connectors can be installed via wire ropes to the ceiling. The polyester product is made by a process of tumbling, needle punching, and baking low and high melting point polyester fibres. The high density fibrous network absorbs sounds and reduces reverberation.

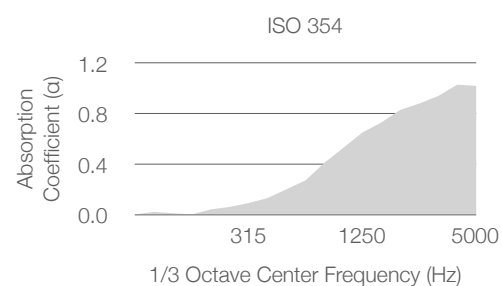

Technical Specifications

| | |
|--------------------|-----------------------------|
| Material | Polyester Board |
| Standard Dimension | 530mm x 530mm |
| Standard Thickness | 12mm |
| Eco-Friendly Test | Oeko-Tex® Standard 100 |
| Fire-Rated Test | EN 13501-1 = Class B s1, d0 |
| Acoustics Test | ISO 354 = NRC 0.41 |