


Polyx™ Tessellate



Trademark and 2024 ©

Polyx™ Tessellate consists of three type of panels namely Kite, Tri & Hex. These faceted three-dimensional panels can be combined in various ways to form different configurations. The polyester product is made by a process of tumbling, needle punching, and baking low and high melting point polyester fibres. The high density fibrous network absorbs sounds and reduces reverberation.

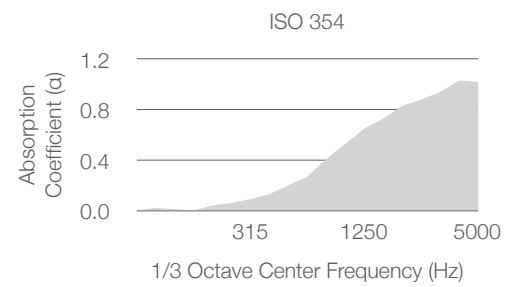

Technical Specifications

Material	Polyester Board
Standard Dimension	Kite: 900mm x 900mm Tri: 450mm x 450mm Hex: 450mm x 780mm
Standard Thickness	12mm
Eco-Friendly Test	Oeko-Tex® Standard 100
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustics Test	ISO 354 = NRC 0.41