


Polyx™ Tri-Hex



Trademark and 2024 ©

Polyx™ Tri-Hex is designed to be modular in nature. The panels consists of three-dimensional triangular panels held together by connectors to create hexagonal units. Each of the connector can be installed via threaded rods to the ceiling. The polyester product is made by a process of tumbling, needle punching, and baking low and high melting point polyester fibres. The high density fibrous network absorbs sounds and reduces reverberation.

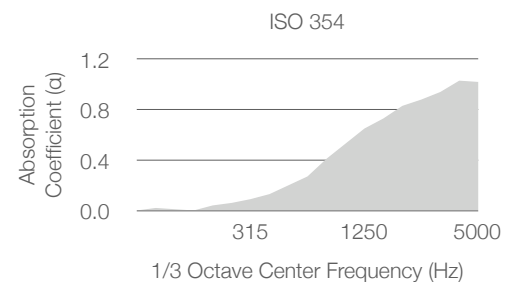

Technical Specifications

Material	Polyester Board
Standard Dimension	300mm x 300mm
Standard Thickness	12mm
Eco-Friendly Test	Oeko-Tex® Standard 100
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustics Test	ISO 354 = NRC 0.41