



# Polyx™ Circuit 1200

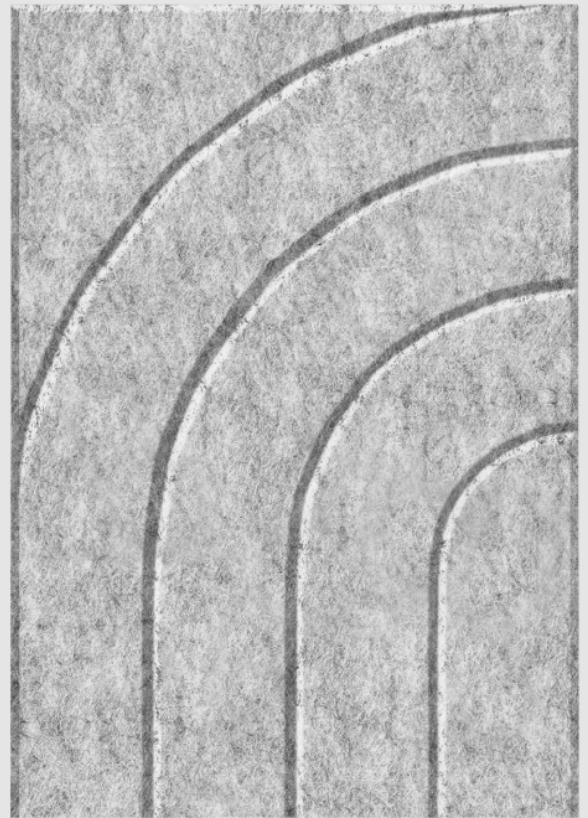

Trademark and 2024 ©

Polyx™ Circuit panels feature a unique design characterised by interconnected curved and linear grooves that evoke the intricate patterns of electronic circuits. The interplay of curved and linear grooves creates a complex, flowing pattern that adds a sense of movement to any space. Polyx™ Polyester Board is made by a process of tumbling, needle punching, and baking low and high melting point polyester fibres. The high density fibrous network absorbs sounds and reduces reverberation.

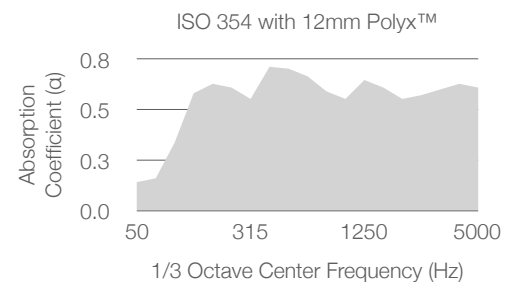

## Technical Specifications

Material	Polyester Board
Standard Dimension	600mmW x 1200mmH
Standard Thickness	9mm, 12mm, 18mm, 24mm
Bevel Dimensions	20mmW x 10mmH
Bevel Angle	45 Degrees
Chamfered Edge	4 Sided
Eco-Friendly Test	EN 13986 = E1
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ISO 354 = NRC 0.65 with 12mm Polyx™ and 100mm Air Gap