


Polyx™ Diagonal 300



Trademark and 2024 ©

Polyx™ Diagonal panels are characterised by finely grooved diagonal lines that run across the surface, creating a subtle yet dynamic sense of movement. When arranged strategically, these panels form a continuous pattern that introduces a sophisticated texture to any space. Polyx™ Polyester Board is made by a process of tumbling, needle punching, and baking low and high melting point polyester fibres. The high density fibrous network absorbs sounds and reduces reverberation.

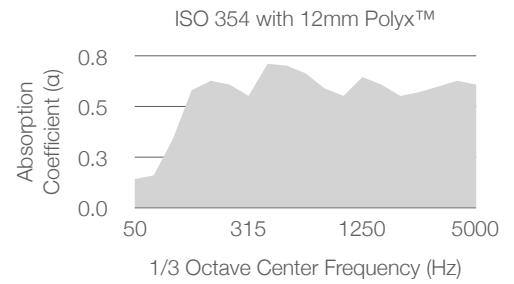

Technical Specifications

Material	Polyester Board
Standard Dimension	300mmW x 300mmH
Standard Thickness	9mm, 12mm, 18mm, 24mm
Bevel Dimensions	20mmW x 10mmH
Bevel Angle	45 Degrees
Chamfered Edge	4 Sided
Eco-Friendly Test	EN 13986 = E1
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ISO 354 = NRC 0.65 with 12mm Polyx™ and 100mm Air Gap