



# Polyx™ Diagonal 600

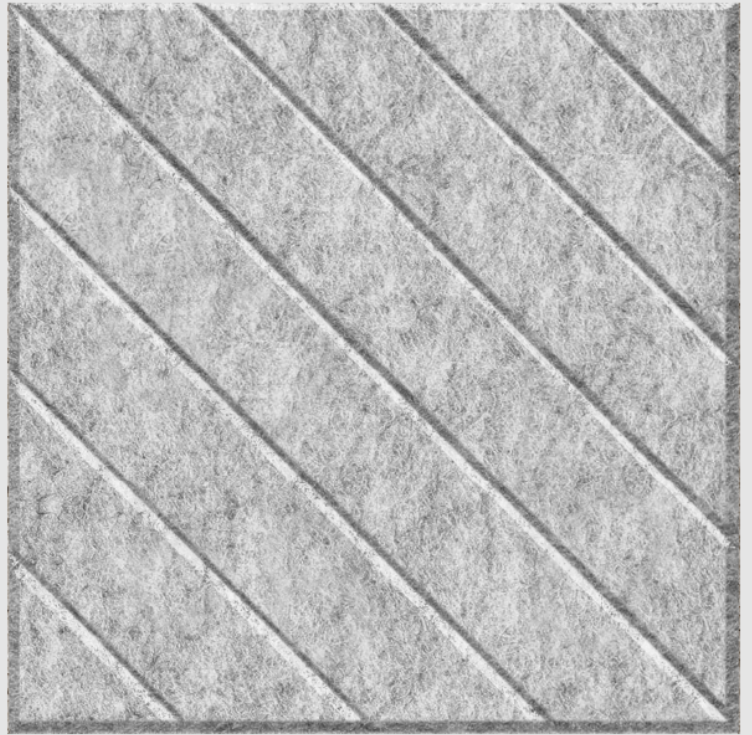

Trademark and 2024 ©

Polyx™ Diagonal panels are characterised by finely grooved diagonal lines that run across the surface, creating a subtle yet dynamic sense of movement. When arranged strategically, these panels form a continuous pattern that introduces a sophisticated texture to any space. Polyx™ Polyester Board is made by a process of tumbling, needle punching, and baking low and high melting point polyester fibres. The high density fibrous network absorbs sounds and reduces reverberation.

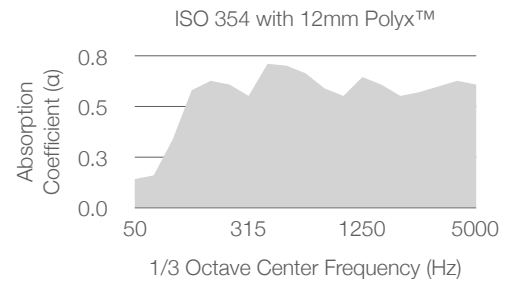

## Technical Specifications

Material	Polyester Board
Standard Dimension	600mmW x 600mmH
Standard Thickness	9mm, 12mm, 18mm, 24mm
Bevel Dimensions	20mmW x 10mmH
Bevel Angle	45 Degrees
Chamfered Edge	4 Sided
Eco-Friendly Test	EN 13986 = E1
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ISO 354 = NRC 0.65 with 12mm Polyx™ and 100mm Air Gap