



Polyx™ Loop 1200

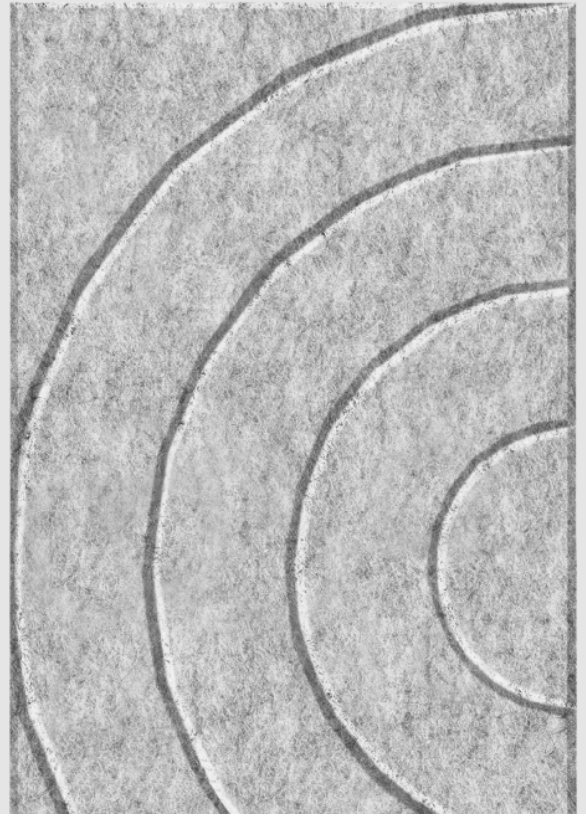

Trademark and 2024 ©

Polyx™ Loop panels feature circular grooves across the surface, adding depth and rhythm to their design. By arranging the panels in various orientations, you can create a repetitive pattern of intersecting circular and linear grooves, resulting in a richly textured geometric aesthetic. Polyx™ Polyester Board is made by a process of tumbling, needle punching, and baking low and high melting point polyester fibres. The high density fibrous network absorbs sounds and reduces reverberation.

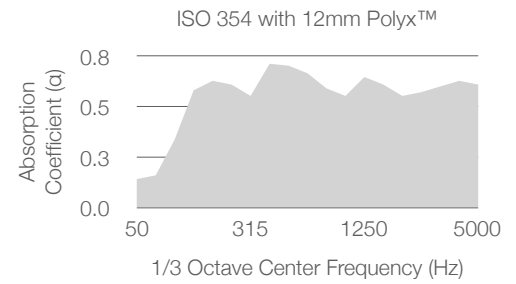

Technical Specifications

Material	Polyester Board
Standard Dimension	600mmW x 1200mmH
Standard Thickness	9mm, 12mm, 18mm, 24mm
Bevel Dimensions	20mmW x 10mmH
Bevel Angle	45 Degrees
Chamfered Edge	4 Sided
Eco-Friendly Test	EN 13986 = E1
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustic Test	ISO 354 = NRC 0.65 with 12mm Polyx™ and 100mm Air Gap