


Polyx™ Curve 38-2



Trademark and 2025 ©

The Polyx™ Curve 38-2 thermocompressed polyester board is made through tumbling, needle punching, and heat and pressure compression. Polyester fibers are tumbled, interlocked, and baked to form a dense, durable structure. This process ensures sound absorption and reverberation control, making it ideal for acoustic enhancement.

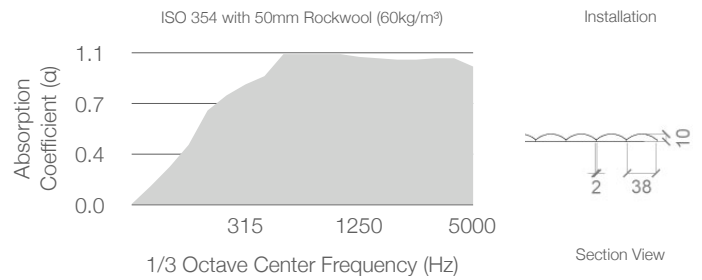

Technical Specifications

Material	Thermocompressed Polyester Board, 100% PET
Design	Curve 38-2
Standard Dimension	1200mm x 2400mm
Material Thickness	3mm
Standard Thickness	10mm
Diameter Sequence	38/2mm
Eco-Friendly Test	Oeko-Tex® Standard 100
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustics Test	ISO 354 = NRC 1.00 with 50mm Rockwool (60kg/m³)